


# Lockout/Tagout

Proper lockout/tagout practices and procedures safeguard workers from the release of hazardous energy. OSHA outlines specific action and procedures for addressing and controlling hazardous energy.

Visit [www.osha.gov](http://www.osha.gov) for complete details and regulation requirements.

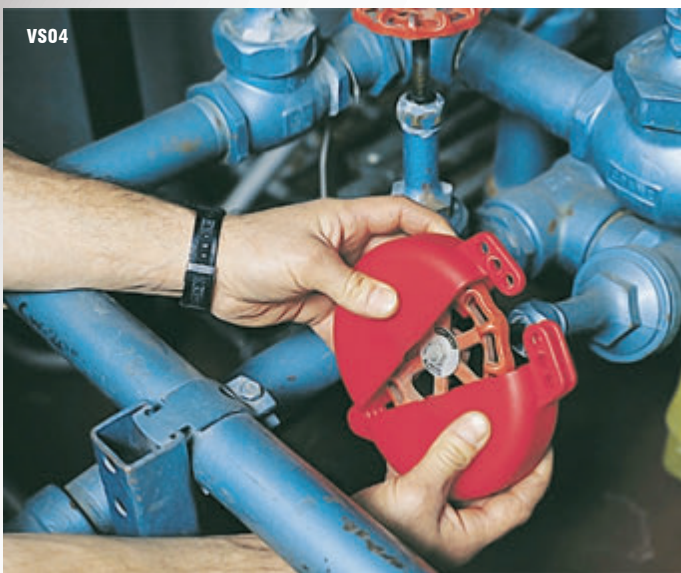

VS04

## Honeywell V-SAFE Valve Lockouts

Helps to properly lockout valve wheels from 1" up to 14" dia. Designed with (2) flattened half-moons that completely cover valve wheel. Made from polypropylene plastic. Fully dielectric and resistant to extreme temperature changes (-50° F to 360° F). Resistant to cracking and abrasion. Meets OSHA 29 CFR 1910.147 and 1910.269 regulations and ANSI Z353.1. Red.



ITEM #	ORDER #	SIZES	UOM
<b>V-Safe Valve Cover</b>			
VS02	347620021	1"-2 1/2"	Ea
VS04	347620041	2 1/2"-5"	Ea
VS06	347626071	5"-6 1/2"	Ea
VS09	347626111	6 1/2"-10"	Ea
VS13	347626151	10"-14"	Ea

## Honeywell B-SAFE Ball Valve Lockouts

Made of durable polypropylene plastic and is fully dielectric. Highly resistant to many solvents and other chemical products. Easy-to-use design is available in three different sizes. Only the BS01 can lock in the open position. Resistant to extreme temperature changes (-50° F to 360° F). Red.



BS01R

ITEM #	ORDER #	DESCRIPTION	UOM
BS01R	347600031	Ball valve lockout, 3/8"-1 1/4", 7/8" handle	Ea
BS02R	347699021	Ball valve lockout, 1 1/2"-2 1/2"	Ea
◆ BS03R	347605991	Ball valve lockout, 2"-8", 1 5/8" handle	Ea
◆ BS04R	347606051	Universal butterfly valve lockout	Ea



BS02R

## Honeywell Cable Lockouts

Hasp is constructed of tough and durable nylon for strength and durability. Can accommodate up to (6) padlocks. Highly visible red color identifies padlock for lockout use. All metal parts are zinc-coated or non-corroding. The 3/16" steel cable is rated at 1,000 lbs. minimum pull strength at the weakest point, which prevents accidental energizations. Cables are PVC-coated for wear resistance. Available in 6' or 10' cable lengths.

ITEM #	ORDER #	SIZES	UOM
◆ CBLOK06R	347607411	6'	Ea
CBLOK10R	347607421	10'	Ea



CBLOK06

CBLOK10R




MS01



### Honeywell M-SAFE Nylon Lockout Hasp

Heavy-duty hasp is made entirely of dielectric nylon. Holds 1-6 padlocks allowing users to properly lockout equipment and prevent accidental operation. Non-conductive and chemical-resistant for strength and durability. Hi-viz red.

ITEM #	ORDER #	DESCRIPTION	UOM
MS01	347619881	Nylon lockout hasp	Ea

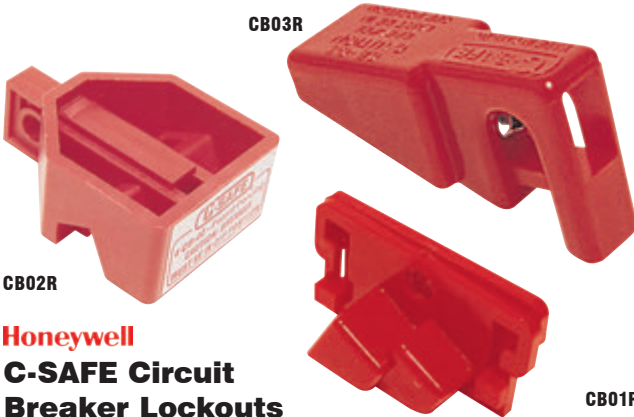

CB02R

CB03R

CB01R

### Honeywell C-SAFE Circuit Breaker Lockouts

Constructed of rigid plastic. Available for single or double pole circuit breaker lockout applications. Red color helps to identify from a distance.

- **CB01** single pole lockout requires a switch breaker with a recessed hole in it
- **CB02** double pole lockout requires the breakers to be connected with a cross bar for lockout application
- **CB03** single pole lockout that does not require a switch breaker with a recessed hole in it

ITEM #	ORDER #	DESCRIPTION	UOM
◆ CB01R	347600075	Single pole lockout	6/Pk
◆ CB02R	347607455	Double pole lockout	6/Pk
◆ CB03R	347600135	Single pole lockout	6/Pk


### Honeywell Group Lock Box

Used for work team situations where multiple employees, energy sources, machines and processes need to be locked out. All keys are securely stored in the tamper-resistant heavy steel lock box. A single person (group leader or foreman) locks the box until the job is complete and all group members are cleared from work area. Helps to simplify lockout procedures for large equipment. Once the equipment or process is locked out, the key or keys are placed in the box. Then, each authorized work team member places a personal lock or tagout device to the group lock box. This ensures that no single person has access to the box unless all employees have removed their locks or tags. Accepts up to (13) individual locks. Bilingual. Red.

ITEM #	ORDER #	DESCRIPTION	UOM
GLB03	347617041	Group lock box	Ea



GLB03

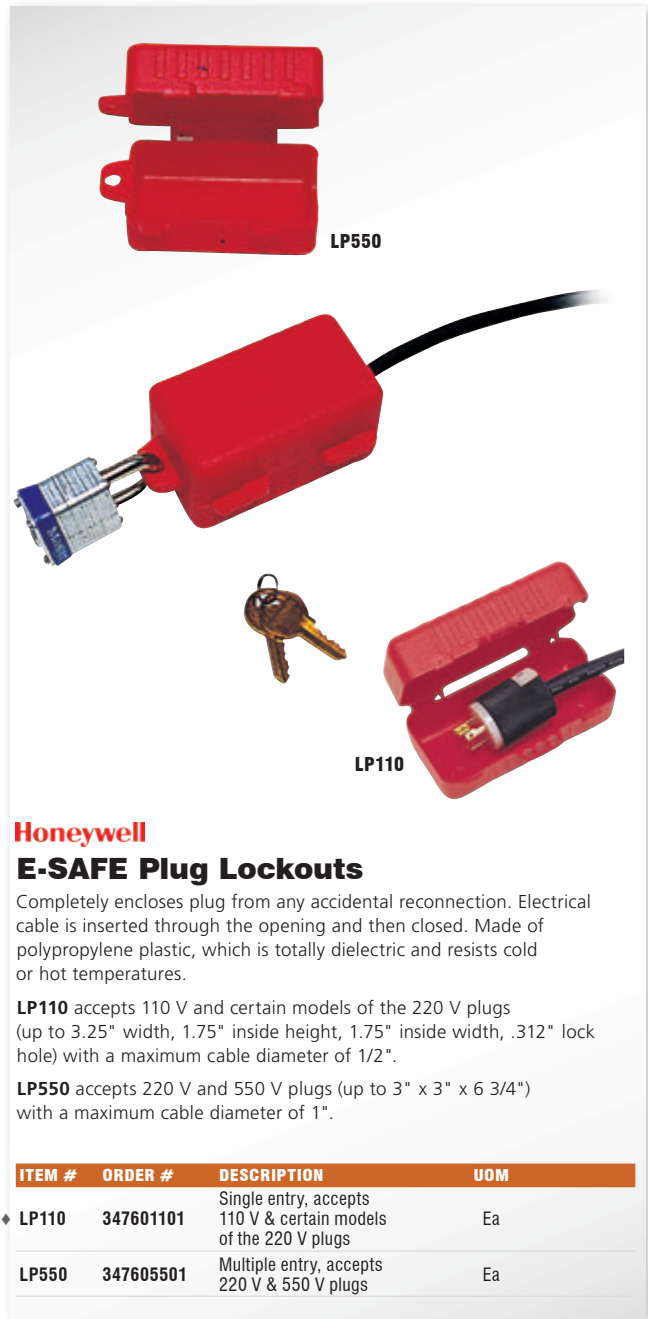

LP550

LP110

### Honeywell E-SAFE Plug Lockouts

Completely encloses plug from any accidental reconnection. Electrical cable is inserted through the opening and then closed. Made of polypropylene plastic, which is totally dielectric and resists cold or hot temperatures.

**LP110** accepts 110 V and certain models of the 220 V plugs (up to 3.25" width, 1.75" inside height, 1.75" inside width, .312" lock hole) with a maximum cable diameter of 1/2".

**LP550** accepts 220 V and 550 V plugs (up to 3" x 3" x 6 3/4") with a maximum cable diameter of 1".

ITEM #	ORDER #	DESCRIPTION	UOM
◆ LP110	347601101	Single entry, accepts 110 V & certain models of the 220 V plugs	Ea
LP550	347605501	Multiple entry, accepts 220 V & 550 V plugs	Ea

◆ Non-stock item. Minimum quantity may apply.